

Product Change Notice (PCN)

Date: **06/28/2024**

PCN Number: **PCN-0456747R-01**


To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: ***SJ2-25414D-SMT-TR***

Reason(s) for Change: ***Manufacturing Improvement processes***

Description of Change: ***New Factory Location. Product re-engineered for improved manufacturability and production yield. See image below for reference and check CUI Devices website for updated drawing. Cosmetic differences may be visible and not affect the form fit and function of the product.***

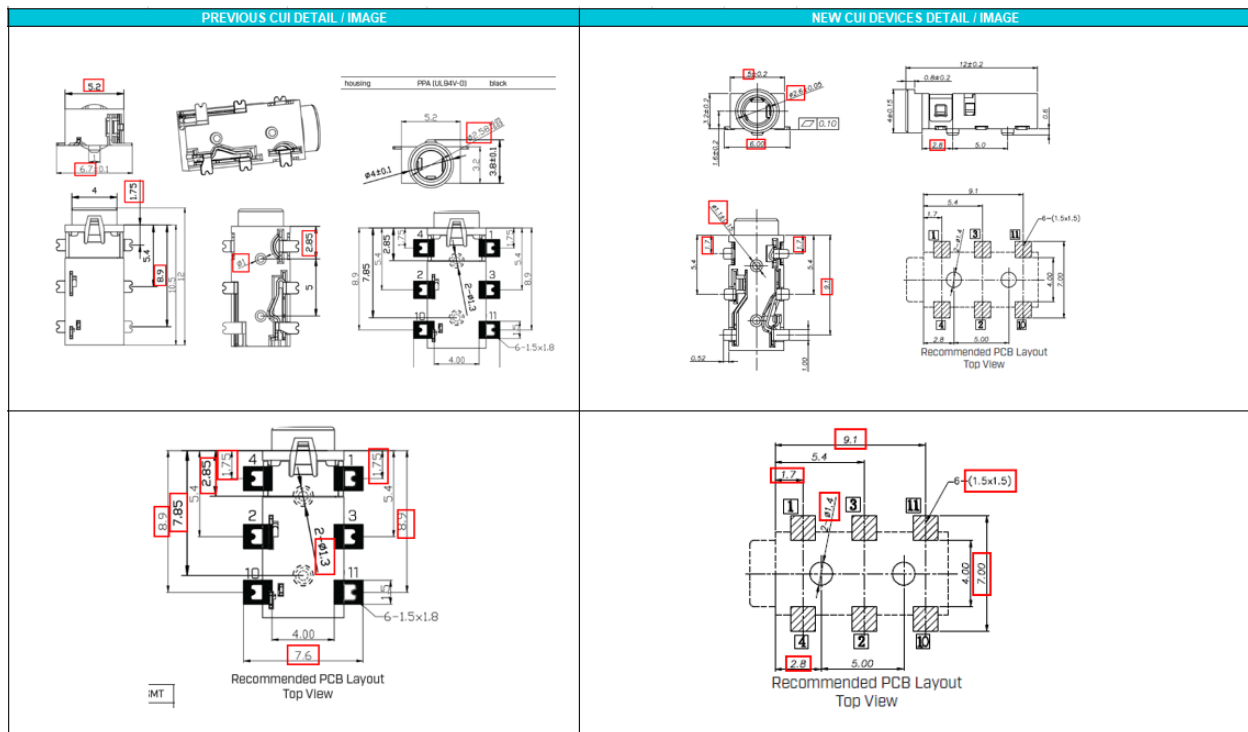

PREVIOUS CUI DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE																																							
<table border="1"> <tr><td>terminal 2</td><td>beryllium bronze</td><td>gold</td></tr> <tr><td>terminal 3</td><td>beryllium bronze</td><td>gold</td></tr> <tr><td>terminal 4</td><td>beryllium bronze</td><td>gold</td></tr> <tr><td>terminal 10</td><td>phosphorus bronze</td><td>gold</td></tr> <tr><td>terminal 11</td><td>phosphorus bronze</td><td>gold</td></tr> <tr><td>housing</td><td>PPA (UL94V-0)</td><td>black</td></tr> </table>	terminal 2	beryllium bronze	gold	terminal 3	beryllium bronze	gold	terminal 4	beryllium bronze	gold	terminal 10	phosphorus bronze	gold	terminal 11	phosphorus bronze	gold	housing	PPA (UL94V-0)	black	<table border="1"> <tr><td>terminal 1</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>terminal 2</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>terminal 3</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>terminal 4</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>terminal 10</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>terminal 11</td><td>phosphor bronze t=0.2</td><td>gold</td></tr> <tr><td>housing</td><td>PA10T (UL94V-0)</td><td>black</td></tr> </table>	terminal 1	phosphor bronze t=0.2	gold	terminal 2	phosphor bronze t=0.2	gold	terminal 3	phosphor bronze t=0.2	gold	terminal 4	phosphor bronze t=0.2	gold	terminal 10	phosphor bronze t=0.2	gold	terminal 11	phosphor bronze t=0.2	gold	housing	PA10T (UL94V-0)	black
terminal 2	beryllium bronze	gold																																						
terminal 3	beryllium bronze	gold																																						
terminal 4	beryllium bronze	gold																																						
terminal 10	phosphorus bronze	gold																																						
terminal 11	phosphorus bronze	gold																																						
housing	PPA (UL94V-0)	black																																						
terminal 1	phosphor bronze t=0.2	gold																																						
terminal 2	phosphor bronze t=0.2	gold																																						
terminal 3	phosphor bronze t=0.2	gold																																						
terminal 4	phosphor bronze t=0.2	gold																																						
terminal 10	phosphor bronze t=0.2	gold																																						
terminal 11	phosphor bronze t=0.2	gold																																						
housing	PA10T (UL94V-0)	black																																						
<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>refl storage</td> <td>10-30°C, <75% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td>250</td> <td>260</td> <td></td> <td>°C</td> </tr> </tbody> </table> <p>drying conditions¹ parts in reel bake at 110°C for 4 hours parts removed from reel bake at 110°C for 4 hours</p> <p>Note: 1. Q33 Device recommended to solder within 72 hours from opening vacuum packaging at a temperature <10°C @ relative humidity <65%. 2. When exceeding floor life by 1500 hours.</p>	parameter	conditions/description	min	typ	max	units	refl storage	10-30°C, <75% humidity				°C	reflow soldering	see reflow profile	250	260		°C	<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>refl storage</td> <td>5-30°C, <75% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td></td> <td></td> <td>260</td> <td>°C</td> </tr> </tbody> </table> <p>drying conditions¹ bake at 110°C for 4 hours</p>	parameter	conditions/description	min	typ	max	units	refl storage	5-30°C, <75% humidity				°C	reflow soldering	see reflow profile			260	°C			
parameter	conditions/description	min	typ	max	units																																			
refl storage	10-30°C, <75% humidity				°C																																			
reflow soldering	see reflow profile	250	260		°C																																			
parameter	conditions/description	min	typ	max	units																																			
refl storage	5-30°C, <75% humidity				°C																																			
reflow soldering	see reflow profile			260	°C																																			
<p>PACKAGING</p> <p>Q333, Q334 Reel Size: 8000 pcs Reel QTY: 1,000 pcs per reel</p>	<p>PACKAGING</p> <p>Q333, Q334 Reel Size: 8000 pcs Reel QTY: 1,000 pcs per reel</p> <p>NOTE: 1. CARRIER TAPE PACKING LENGTH: TRAILER CONNECTORS LEADER(START) REEL END 2. FEEDING FORCE: 0.2N-1.5N (20g-150g)</p>																																							

Affected Date Code: All orders placed before 08/28/2024 will be pre-PCN parts. Orders placed after 08/28/2024 will be manufactured in accordance with the PCN. Please check updated 2D drawing on or after 08/28/2024.

PCN Approval:

Operations/Quality

Product Management